


PLATFORMS ARE PROVIDED TO CREATE A KIOSK DESTINATION FOR RIDE ENTERTAINMENT

Kiosk Description

- Each platform is 3-1/2" high and has 1/8" thick industrial-grade non-skid flooring with bullnose edging that is sprayed with urethane coating.
- Change machines are included as a convenience to customers. Each change machine is housed in a durable fiberglass crayon design column that is 7'4" high. Black floor model change machines are also available.
- Electrical cords on the kiddie rides are channeled beneath the flooring of each platform to the available power source.


Each platform is custom built to your specifications. Standard platform dimensions and power requirements are as follows:

Ride Capacity
Six (6) Kiddie Rides

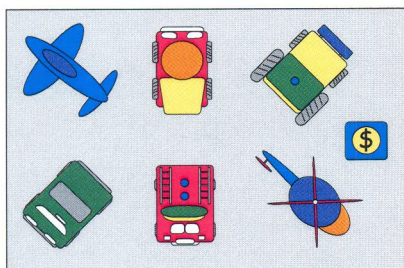


12' x 18'


Ride Capacity
Four (4) Kiddie Rides

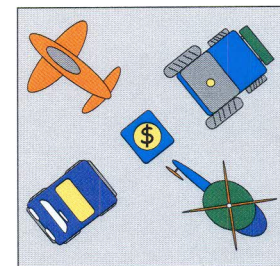


12' x 12'

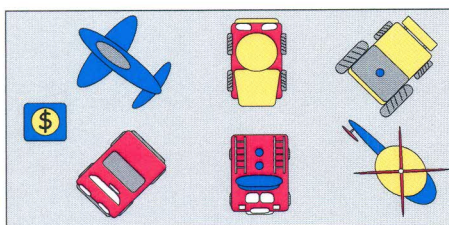


10' x 20'

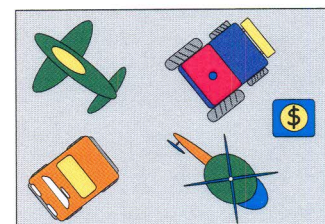

10' x 14'

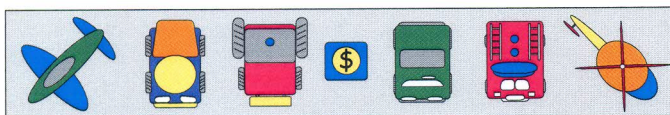

5' x 30'

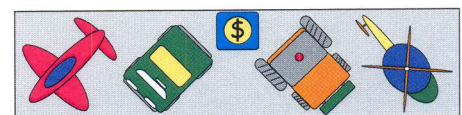

5' x 20'

Power Requirements
Two 20-amp or One 30-amp
110 volt, dedicated circuit

Power Requirements
One 20-amp, 110 volt
dedicated circuit